



FUL SERIES


105°C, Long Life(5000hrs), PCB Mounting

- 105°C 5000 hours assured life.
- Directly mountable on printed circuit board without holders.
- Low ESR and long life.
- Terminal spacing fixed at 10mm for PC board plug in.
- Aluminum case designed explosion-proof vent.

Characteristics

Voltage Range	10 ~ 100V		160 ~ 400V					
Capacitance Range	560 ~ 47000uF		68 ~ 1500uF					
Temperature Range	-40 ~ +105°C		-25 ~ +105°C					
Capacitance Tolerance	□20% at 120Hz, 20°C (10% Tol. is available upon request)							
Leakage Current	$I=3\sqrt{CV}$ uA max C: Capacitance, V:W.V. (After 5 minutes)							
Dissipation Factor (tan δ)	Rated voltage	10	16	25	35	50	63 ~ 100	160 ~ 400
	tan δ	0.55	0.40	0.30	0.25	0.20	0.15	0.15
at 20°C, 120Hz								
Stability at Low Temperature	Impedance ration at 120Hz between the -25°C or -40°C value and 20°C value shall not exceed the values given below.							
	Rated Voltage (V)	10, 16	25	35	50, 63	80, 00	160 ~ 350	
	Z-25°C/Z 20°C	4	3	3	2	2	4	
Z-40°C/Z 20°C	15	10	8	6	5	-		
Load Life	The following specifications shall satisfied when the capacitors are restored to 20°C after rated working voltage applied for 5,000 hours at max. Operating temperature with the rated ripple current applied.							
	Capacitance change	≤ □25% of the initial value.						
Dissipation factor	≤ □250% of the initial specified value							
Leakage current	≤ The initial specified value.							
Shelf Life	After storage for 1000 hours at 105°C with no voltage applied, the capacitor shall meet the specified limit in load life.							

Diagram of dimensions

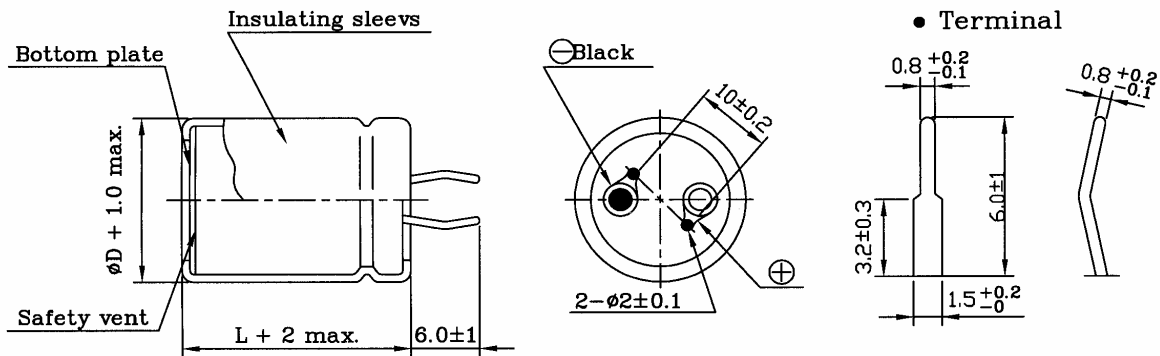

Multiplier for Ripple Current VS Frequency

Rated Voltage \ (Hz)	50/60	120	300	1K	10K	50K
10 ~ 50 VDC	0.95	1	1.03	1.05	1.08	1.08
63 ~ 100 VDC	0.93	1	1.07	1.13	1.19	1.20
160 ~ 250 VDC	0.81	1	1.17	1.32	1.45	1.50
350 ~ 400 VDC	0.77	1	1.16	1.30	1.41	1.43



FUL SERIES

105°C, Long Life(5000hrs), PCB Mounting

Standard Products Table

W.V(DC)	CAP. (μF)	Ripple Current A max. 105°C, 120Hz	Dimensions A		Dimensions B		Dimensions C	
			D φ	L	D φ	L	D φ	L
10	6800	1.30	22	25	-		-	
	10000	1.60	22	30	25	25	-	
	15000	2.10	22	35	25	30	-	
	22000	2.75	22	40	25	35	30	30
	33000	3.40	25	50	30	40	35	35
	47000	4.60	30	50	-		-	
16	4700	1.30	22	25	-		-	
	6800	1.60	22	30	25	25	-	
	10000	2.10	22	40	25	30	-	
	15000	2.70	22	50	25	40	30	30
	22000	3.40	25	50	30	40	35	35
	33000	4.32	30	50	35	40	-	
25	3300	1.10	22	25	-		-	
	4700	1.50	22	30	25	25	-	
	6800	1.87	22	40	25	30	-	
	10000	2.35	22	50	25	40	30	35
	15000	3.15	30	40	35	35	-	
	22000	3.90	35	45	-		-	
35	2200	1.10	22	25	-		-	
	3300	1.40	22	30	25	25	-	
	4700	1.75	22	40	25	30	-	
	6800	2.20	22	50	25	40	30	35
	10000	2.80	30	40	35	35	-	
	15000	4.25	35	50	-		-	
50	2200	1.30	22	35	25	25	-	
	3300	1.70	22	40	25	35	30	30
	4700	2.10	25	40	30	35	-	
	6800	2.70	30	50	35	40	-	
	10000	3.50	35	50	-		-	
63	1000	1.00	22	25	-		-	
	1500	1.30	22	35	25	30	-	
	2200	1.65	25	35	30	30	-	
	3300	2.15	25	50	30	35	-	
	4700	2.70	30	50	35	40	-	
	6800	3.50	35	50	-		-	
80	680	0.95	22	25	-		-	
	1000	1.20	22	35	25	25	-	
	1500	1.60	22	45	25	35	-	
	2200	2.05	25	50	30	35	-	
	3300	2.70	30	50	35	40	-	
	4700	3.40	35	50	-		-	



FUL SERIES

105°C, Long Life(5000hrs), PCB Mounting

Standard Products Table

W.V(DC)	CAP. (μF)	Ripple Current A max. 105°C, 120Hz	Dimensions A		Dimensions B		Dimensions C	
			D φ	L	D φ	L	D φ	L
100	680	1.10	22	35	25	30	-	
	1000	1.40	22	50	30	30	-	
	1500	1.85	25	50	30	40	-	
	2200	2.40	35	50	30	40	-	
160	220	0.50	22	25	-		-	
	330	0.80	22	35	25	25	-	
	470	1.10	22	45	25	35	30	30
	680	1.30	25	45	30	35	-	
	1000	1.69	30	45	35	35	-	
	1500	2.40	35	50	-		-	
200	220	0.65	22	30	-		-	
	330	0.78	22	40	25	30	-	
	470	1.15	22	50	25	40	30	30
	680	1.45	25	50	30	40	-	
	1000	1.90	30	50	35	40	-	
250	150	0.52	22	25	-		-	
	220	0.75	22	35	25	30	-	
	330	1.00	22	45	25	35	30	30
	470	1.20	25	50	30	35	-	
	680	1.55	30	50	35	40	-	
	1000	2.00	35	50	-		-	
350	68	0.34	22	25	-		-	
	100	0.50	22	35	25	25	-	
	150	0.63	22	45	25	35	30	30
	220	0.82	25	50	30	35	-	
	330	1.10	30	50	35	40	-	
	470	1.30	35	50	-		-	
400	47	0.30	22	25	-		-	
	68	0.40	22	30	25	25	-	
	100	0.50	22	40	25	30	-	
	150	0.65	22	50	25	40	30	35
	220	0.85	25	50	30	40	35	35
	330	1.10	35	45	-		-	
	390	1.20	35	50	-		-	


ORDERING INFORMATION for Leaded Type



Daewoo Components Corp.

Through-Hole Part Numbering System Example:

RM = Leaded Radial 85°C Miniature Series, **102** = 1000µF, **M** =20% Tolerance, **1E** 25 Volts, **B** = Bulk,
1020 = Case size (Dia x H) = 10.0 x 20.0mm, **E** = 5.0mm

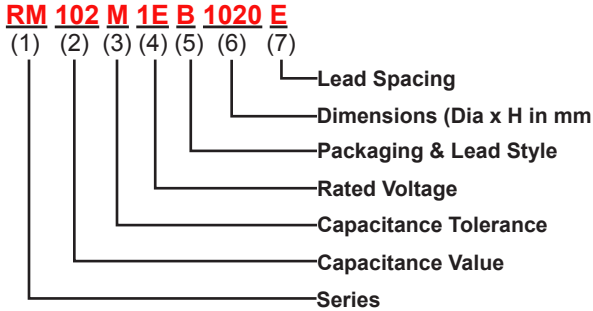

(1) Series

See Quick Guide on page 2
Example: RSS, RM, RMU,...

(2) Capacitance Value Code

Capacitance expressed in micro Farads (µF)
First two digits are significant figures
Third digit denotes the number of zeros
Use R for decimal point for values less than 10µF

Examples:

CODE	Capacitance
R10	0.1 µF
R68	0.68 µF
1R0	1.0 µF
100	10 µF
680	68 µF
471	470 µF
102	1000 µF
103	10000 µF

(3) Capacitance Tolerance Code

CODE	Cap. Tol.	CODE	Cap. Tol.
J	±5%	V	-10% ~ +20%
K	±10%	Q	-10% ~ +30%
M	±20%	T	-10% ~ +50%
R	+20%, -0%		

(4) Rated Voltage Code

CODE	Voltage	CODE	Voltage
0G	4.0V	2C	160V
0J	6.3V	2S	180V
1A	10V	2D	200V
1C	16V	2E	250V
1E	25V	2F	315V
1V	35V	2V	350V
1H	50V	2G	400V
1J	63V	2W	450V
1K	80V	3Z	1000V
2A	100V		

(5) Packaging Form & Lead Style Code (see page 7, 8, 9 for details)

	Code	Packaging Form & Lead Style
Bulk	B	Bulk: Standard Package
	L	Bulk: 4 -8ø Long Leads Formed to 5 mm Pitch
Snap-In	1	10-13ø Snap-in Cut 5.0mm
	2	16-13ø Snap-in Cut 5.0mm
	3	10-13ø Snap-in Cut 4.5mm
	4	16-18ø Snap-in Cut 4.5mm
	5	4-8ø Snap-in Cut 7.5mm
Form	F	4-8ø Forming Cut 6.5mm
	G	4-8ø Forming Cut 10.0mm
Straight Cut	C	4-18ø Straight Cut 4.0mm
	6	4-18ø Straight Cut 3.1mm
	7	4-18ø Straight Cut 5.0mm
	8	4-18ø Straight Cut 6.35mm
Ammo Tape (+) Leading	A	4-8ø Straight Ammo Detail Ranges: 4-6.3ø; F=2.5mm 8ø; F=3.5mm
		4-8ø Form Tape & Ammo 5mm Pitch
		10ø Straight Ammo Tape 5mm Pitch
		13ø Straight Ammo Tape 5mm Pitch
		16-18ø Straight Ammo Tape 5mm Pitch
Tape & Reel (+) Leading	T	4-8ø Straight Ammo Detail Ranges: 4-6.3ø; F=2.5mm 8ø; F=3.5mm
		4-13ø Form Tape & Reel 5mm Pitch
		10-13ø Straight Reel Tape 5mm Pitch

NOTE: Standard Pack Anode(+) Lead Leading FEEDS OFF FIRST
Special Option Cathode(-) Lead Leading available upon request
Standard Packages: B = Bulk, A = Ammo, T = Tape & Reel

(6) Example Dimension Code (Diameter x Height in mm)

Size Code	Diameter	Height	Size Code	Diameter	Height
0405	4	5	1320	13	20
0407	4	7	1631	16	31.5
0505	5	5	1835	18	35.5
0507	5	7	2240	22	40
0607	6.3	7	2545	25	45
0511	5	11	3035	30	35
0605	6	5	3500	35	100
0611	6.3	11	3501	35	110
0805	8	5	5102	51	120
0811	8	11	6303	63.5	130
1012	10	12.5	7604	76	140
1220	12.5	20	8904	89	140

(7) Lead Spacing Code (LS)

Code	X	A	B	C	D	E	J	F
LS	1.0	1.5	2.0	2.5	3.5	5.0	7.0	7.5
Code	K	M	G	P	H	Q	R	S
LS	8.0	10.0	10.5	12.0	12.5	12.8	15.0	16.0
Code	T	U	V	W	Y	Z		
LS	20.0	21.7	28.3	30.0	31.6	32		