


RMB SERIES

Miniature, Bi-Polar, Radial Leads

Features


- Bi-polar, Miniature
- Lengths are all 7mm, Radial
- Micro cassette, VTR, video camera, car stereo etc.
- Load life of 1000 hours at 85°C

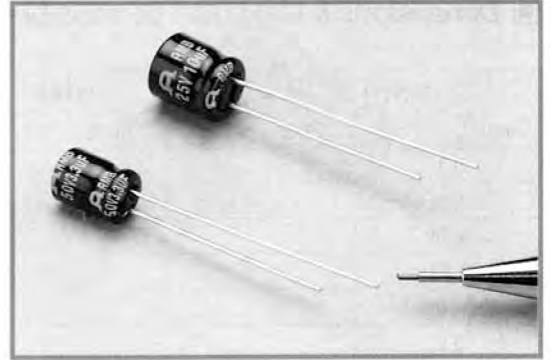

Specifications

Item	Performance Characteristics							
Operating temperature range	-40°C ~ +85°C							
Rated working voltage range	6.3V ~ 50V							
Nominal capacitance range	0.1μF ~ 47μF, ±20%(at 20°C, 120Hz)							
D.C Leakage current(at 20°C)	The following specifications shall be satisfied when the rated voltage is applied for the required time. $I \leq 0.05CV$ or $10\mu A(2 \text{ min})$, whichever is greater Where I=Leakage current(μA) C=Nominal capacitance(μF) V=Rated voltage(V)							
Tan δ(max., at 20°C, 120Hz)	W.V(V)	6.3	10	16	25	35	50	
	Tan δ	0.28	0.25	0.20	0.16	0.15	0.14	
Characteristics at low temperature(max.) (impedance ratio at 120Hz)	W.V(V)	6.3	10	16	25	35	50	
	Z-25°C/Z20°C	4	3	2	2	2	2	
	Z-40°C/Z20°C	10	8	6	4	4	4	
Load life	After applying rated working voltage for 1000 hours at +85°C with the polarity inverted every 500 hours and then being stabilized at ±20°C, capacitors shall meet following limits.							
	Capacitance change	Within ±20% of the initial measured value						
	Tan δ	≤ 200% of the initial specified value						
	Leakage current	≤ The initial specified value						
Shelf life	After storage for 500 hours at +85°C with no voltage applied and then being stabilized at +20°C, capacitors shall meet following limits.							
	Capacitance change	Within ±20% of the initial measured value						
	Tan δ	≤ 150% of the initial specified value						
	Leakage current	≤ 200% of the initial specified value						

Dimensions

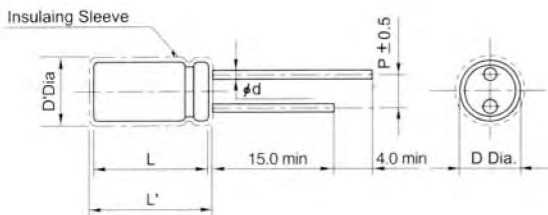

• Standard lead style

φD	4.0	5.0	6.3
p	1.5	2.0	2.5
φd	0.45		

D' = [D+0.5]Max.

L' = [L+1.0]Max.

RMB SERIES

▣ Dimensions & Maximum permissible ripple current

 $\phi D \times L$ (mm)

Cap(μF)	W.V(V)	6.3(0J)		10(1A)		16(1C)		25(1E)		35(1V)		50(1H)		
		SIZE	I _r	SIZE	I _r	SIZE	I _r	SIZE	I _r	SIZE	I _r	SIZE	I _r	
0.1												4x7	2.0	
0.22												4x7	3.0	
0.33												4x7	5.0	
0.47												4x7	7.0	
1.0												4x7	10	
2.2											4x7	12	4x7	15
3.3								4x7	15	4x7	16	5x7	20	
4.7						4x7	15	5x7	20	5x7	25	6.3x7	30	
10				4x7	25	5x7	30	6.3x7	35	6.3x7	40			
22		5x7	30	5x7	40	6.3x7	50	6.3x7	55					
33		5x7	45	6.3x7	55	6.3x7	60							
47		6.3x7	65	6.3x7	70									

 I_r: Maximum permissible ripple current[mA(rms) at 85°C,120Hz]

ORDERING INFORMATION for Leaded Type



Daewoo Components Corp.

Through-Hole Part Numbering System Example:

RM = Leaded Radial 85°C Miniature Series, **102** = 1000µF, **M** =20% Tolerance, **1E** 25 Volts, **B** = Bulk,
1020 = Case size (Dia x H) = 10.0 x 20.0mm, **E** = 5.0mm



(1) Series

See Quick Guide on page 2
Example: RSS, RM, RMU,...

(2) Capacitance Value Code

Capacitance expressed in micro Farads (µF)
First two digits are significant figures
Third digit denotes the number of zeros
Use R for decimal point for values less than 10µF

Examples:

CODE	Capacitance
R10	0.1 µF
R68	0.68 µF
1R0	1.0 µF
100	10 µF
680	68 µF
471	470 µF
102	1000 µF
103	10000 µF

(3) Capacitance Tolerance Code

CODE	Cap. Tol.	CODE	Cap. Tol.
J	±5%	V	-10% ~ +20%
K	±10%	Q	-10% ~ +30%
M	±20%	T	-10% ~ +50%
R	+20%, -0%		

(4) Rated Voltage Code

CODE	Voltage	CODE	Voltage
0G	4.0V	2C	160V
0J	6.3V	2S	180V
1A	10V	2D	200V
1C	16V	2E	250V
1E	25V	2F	315V
1V	35V	2V	350V
1H	50V	2G	400V
1J	63V	2W	450V
1K	80V	3Z	1000V
2A	100V		

(5) Packaging Form & Lead Style Code (see page 7, 8, 9 for details)

	Code	Packaging Form & Lead Style
Bulk	B	Bulk: Standard Package
	L	Bulk: 4 -8ø Long Leads Formed to 5 mm Pitch
Snap-In	1	10-13ø Snap-in Cut 5.0mm
	2	16-13ø Snap-in Cut 5.0mm
	3	10-13ø Snap-in Cut 4.5mm
	4	16-18ø Snap-in Cut 4.5mm
	5	4-8ø Snap-in Cut 7.5mm
Form	F	4-8ø Forming Cut 6.5mm
	G	4-8ø Forming Cut 10.0mm
Straight Cut	C	4-18ø Straight Cut 4.0mm
	6	4-18ø Straight Cut 3.1mm
	7	4-18ø Straight Cut 5.0mm
	8	4-18ø Straight Cut 6.35mm
Ammo Tape (+) Leading	A	4-8ø Straight Ammo
		Detail Ranges: 4-6.3ø; F=2.5mm 8ø; F=3.5mm
		4-8ø Form Tape & Ammo 5mm Pitch
		10ø Straight Ammo Tape 5mm Pitch
		13ø Straight Ammo Tape 5mm Pitch
16-18ø Straight Ammo Tape 5mm Pitch		
Tape & Reel (+) Leading	T	4-8ø Straight Ammo
		Detail Ranges: 4-6.3ø; F=2.5mm 8ø; F=3.5mm
		4-13ø Form Tape & Reel 5mm Pitch
		10-13ø Straight Reel Tape 5mm Pitch

NOTE: Standard Pack Anode(+) Lead Leading FEEDS OFF FIRST
Special Option Cathode(-) Lead Leading available upon request
Standard Packages: B = Bulk, A = Ammo, T = Tape & Reel

(6) Example Dimension Code (Diameter x Height in mm)

Size Code	Diameter	Height	Size Code	Diameter	Height
0405	4	5	1320	13	20
0407	4	7	1631	16	31.5
0505	5	5	1835	18	35.5
0507	5	7	2240	22	40
0607	6.3	7	2545	25	45
0511	5	11	3035	30	35
0605	6	5	3500	35	100
0611	6.3	11	3501	35	110
0805	8	5	5102	51	120
0811	8	11	6303	63.5	130
1012	10	12.5	7604	76	140
1220	12.5	20	8904	89	140

(7) Lead Spacing Code (LS)

Code	X	A	B	C	D	E	J	F
LS	1.0	1.5	2.0	2.5	3.5	5.0	7.0	7.5
Code	K	M	G	P	H	Q	R	S
LS	8.0	10.0	10.5	12.0	12.5	12.8	15.0	16.0
Code	T	U	V	W	Y	Z		
LS	20.0	21.7	28.3	30.0	31.6	32		